


Coupon Rack Specifications

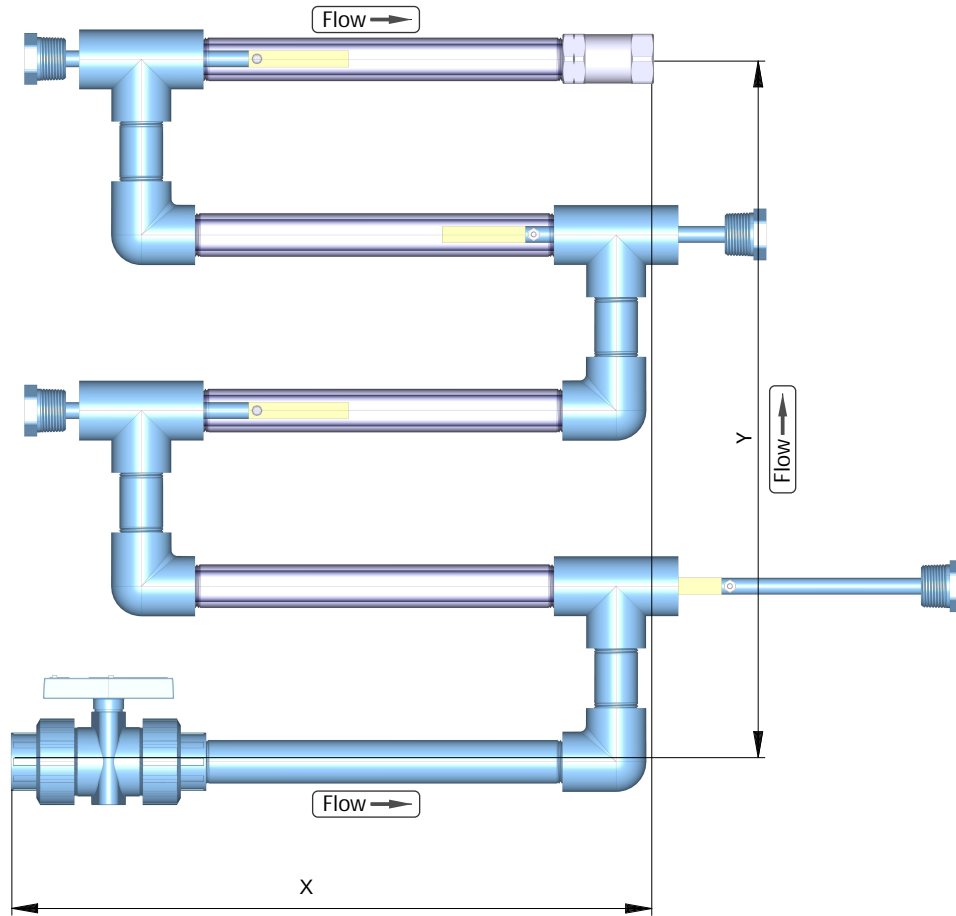

Approximate Dimensions (inches) for 1" NPT pipe, 0.60" thread engagement

Number of Coupon Stations	Sch 80 PVC		Sch 80 CPVC		Sch 40 Black Steel		Sch 40 Stainless Steel		Sch 40 Brass	
	X	Y	X	Y	X	Y	X	Y	X	Y
2	19.9	10.6	19.5	10.6	17.1	10.6	17.2	10.6	17.1	10.6
4	19.9	21.1	19.5	21.1	17.1	21.1	17.2	21.1	17.1	21.1
6	19.9	31.7	19.5	31.7	17.1	31.7	17.2	31.7	17.1	31.7
8	19.9	42.3	19.5	42.3	17.1	42.3	17.2	42.3	17.1	42.3

Pressure Temperature Ratings

- Flow Control Valve 200 PSI at 180°F
- Black Steel Pipe 150 PSI at 360°F Steam Service
- Stainless Steel 150 PSI at 360°F Steam Service

Maximum Pipe Service Pressure (PSI) Assembly service pressure limited by lowest pressure component

Sch 80 PVC	73°F	80°F	90°F	100°F	110°F	120°F	130°F	140°F
¾" NPT	345	304	259	214	176	141	107	76
1" NPT	315	277	236	195	161	129	98	69

Sch 80 CPVC	73°F	80°F	90°F	100°F	110°F	120°F	130°F	140°F	150°F	160°F	170°F	180°F	190°F	200°F
¾" NPT	345	345	314	283	248	224	197	173	145	138	100	86	78	69
1" NPT	315	277	287	258	227	205	180	158	132	126	91	79	71	63